

LED LOADING BAY DOCK LIGHT

The Ritelite LED loading bay dock light offers users a high quality, highly durable LED alternative to previous halogen models with increased lumen output, increased robustness and a solution that is virtually maintenance free.




The unit features a variable focusing system that can be adjusted between spot and flood beams (or both at once) for multiple applications, the spot beam enables light to reach further inside container / warehouse area and the light can be focused to ensure minimum glare to workers.


FLOOD BEAM





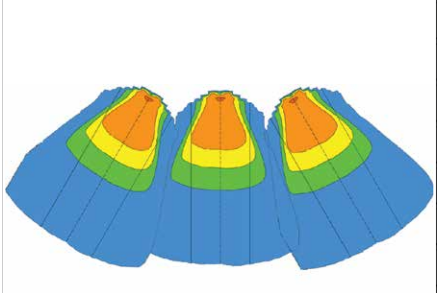

BLEND BEAM FROM SPOT TO FLOOD

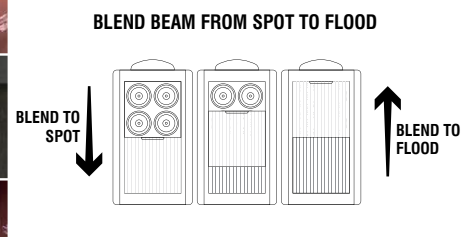







SPOT BEAM






KEY FEATURES

- Minimal power consumption
- Maintenance free – 50,000 hour life
- High output LED's – 12000 lumen output!
- Spot to flood variable focusing system
- Compact head design to reduce possibility of impact damage
- Suitable for food grade applications – polycarbonate lens – No glass!
- IP65 LED head – Dust tight and able to withstand water.
- Suitable for input voltage of 110-240V AC
- Shock and vibration resistant
- Compact, foldable design enables light to be folded back against the wall of the dock when not in use.
- Moves in 2 planes and pivots at 3 points to allow user to easily and accurately position light where required for maximum control of light.
- All components made from high quality materials to ensure maximum life in arduous conditions
- Smooth friction based infinite adjustment of head and arm also allows the light to deflect out of the way if pushed from passing loads
- Connection to mains supply via 5amp fuse.

OPERATION

To use the unit simply press the on button and the light will come on to 100% power/brightness and is ready for use. The additional buttons shown below allow other features to be accessed.

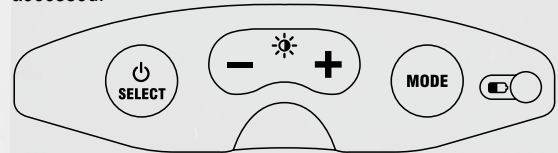

(Button 1) = ON/OFF / SELECT. Select between all 3 headlets or an individual one.

(Button 2) = Decrease brightness in 10% increments -
From 150% to 10%

(Button 3) = Increase brightness in 10% increments -
From 10% to 150%

(Button 4) = MODE - Choose from solid white, flashing white, or SOS flashing.

PRODUCT CODE	WATTAGE	VOLTAGE	LUMEN OUTPUT	DIMENSIONS (W x H x D)	WEIGHT
LB/LEDK10	90W	110-240V	12000	Storage: 88.5cm x 24cm x 22cm Fully extended length: 1m 45cm	5.1Kg

VIEW FROM ABOVE



VIEW FROM FRONT



Three headlets allow the light to be directed any way you wish up to 360°, with a choice of spot, flood, or combination of both.