


LED LOADING BAY DOCK LIGHT


The Ritelite LED loading bay dock light offers users a high quality, highly durable LED alternative to previous halogen models with increased lumen output, increased robustness and a solution that is virtually maintenance free.




The unit features a rotating variable focusing system that can be blended between spot and flood beams for multiple applications, the spot beam enables light to reach further inside container / warehouse area and the light can be focused to ensure minimum glare to workers.




FLOOD BEAM




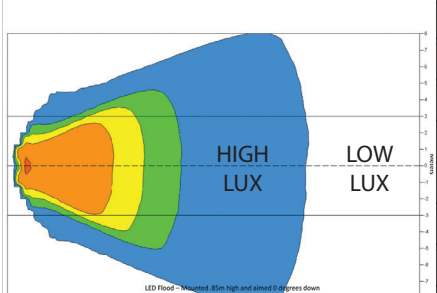


LED Flood - Mounted 25m high and aimed 0 degrees down




BLEND FROM SPOT TO FLOOD

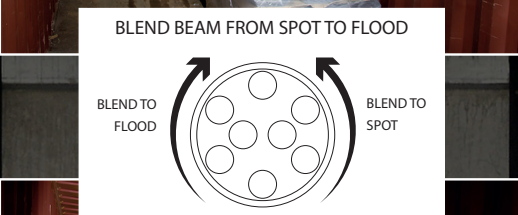


BLEND BEAM FROM SPOT TO FLOOD

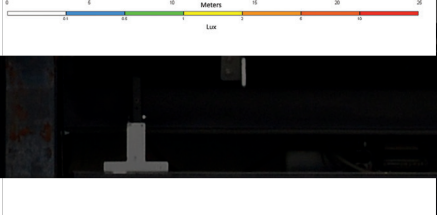


LED Spot - Mounted 25m high and aimed 0 degrees down



SPOT BEAM



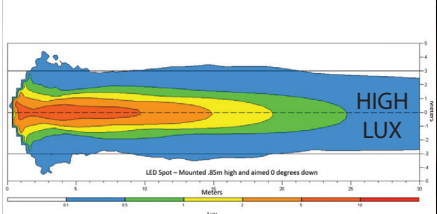

LED Spot - Mounted 25m high and aimed 0 degrees down




KEY FEATURES

- Minimal power consumption
- Maintenance free – 50,000 hour life
- High output LED's – 5000 lumen output!
- Spot to flood variable focusing system
- Compact head design to reduce possibility of impact damage
- Suitable for food grade applications – polycarbonate lens – No glass!
- IP54 LED head – Dust tight and able to withstand water spray.
- Options available for a range of input voltage including 110-240V, 24V AC & 24V DC
- Shock and vibration resistant
- Compact, foldable design enables light to be folded back against the wall of the dock when not in use.
- Moves in 2 planes and pivots at 3 points to allow user to easily and accurately position light where required for maximum control of light.
- All components made from high quality materials to ensure maximum life in arduous conditions
- Smooth friction based infinite adjustment of head and arm also allows the light to deflect out of the way if pushed from passing loads
- Connection to mains supply via 5amp fuse.

PRODUCT CODE	WATTAGE	VOLTAGE	LUMEN OUTPUT	DIMENSIONS (W x H x D)	WEIGHT
LB/LEDK8/HP	37W	110-240V	5000	Storage: 84.5cm x 24cm x 22cm Fully extended length: 1m 41cm	4.5Kg
LB/LEDK8/HP/24V	37W	24V AC	5000	Storage: 84.5cm x 24cm x 22cm Fully extended length: 1m 41cm	4.5Kg
LB/LEDK8/HP/24VDC	37W	24V DC	5000	Storage: 84.5cm x 24cm x 22cm Fully extended length: 1m 41cm	4.5Kg

VIEW FROM ABOVE

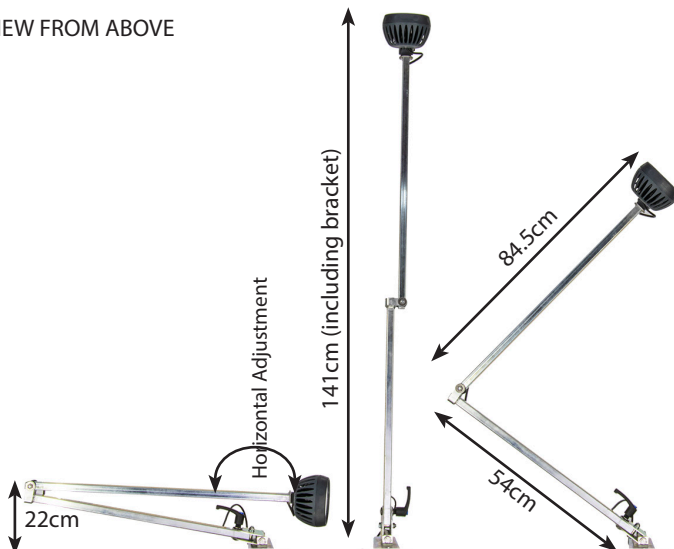

VIEW FROM FRONT

