

# LED LOADING BAY DOCK LIGHT

The Ritelite LED loading bay dock light offers users a high quality, highly durable LED alternative to previous halogen models with increased lumen output, increased robustness and a solution that is virtually maintenance free.



The unit features a variable focusing system that can be adjusted between spot and flood beams for multiple applications, the spot beam enables light to reach further inside container / warehouse area and the light can be focused to ensure minimum glare to workers.

**FLOOD BEAM**









LED Flood - Mounted 25m high and aimed 0 degrees down

**BLEND FROM SPOT TO FLOOD**



**BLEND BEAM FROM SPOT TO FLOOD**

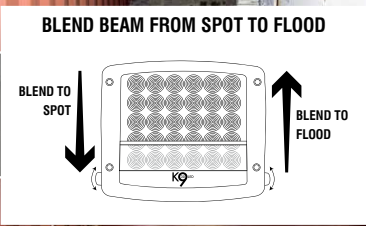

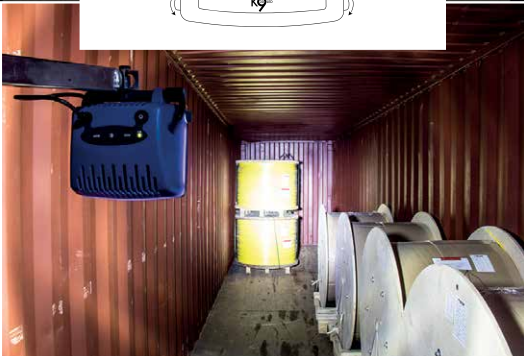



LED Spot - Mounted 25m high and aimed 0 degrees down

**SPOT BEAM**






## KEY FEATURES

- Minimal power consumption
- Maintenance free – 50,000 hour life
- High output LED's – 6600 lumen output!
- Spot to flood variable focusing system
- Compact head design to reduce possibility of impact damage
- Suitable for food grade applications – polycarbonate lens – No glass!
- IP54 LED head – Dust tight and able to withstand water spray.
- Suitable for input voltage of 110-240V AC
- Shock and vibration resistant
- Optional remote control
- Compact, foldable design enables light to be folded back against the wall of the dock when not in use.
- Moves in 2 planes and pivots at 3 points to allow user to easily and accurately position light where required for maximum control of light.
- All components made from high quality materials to ensure maximum life in arduous conditions
- Smooth friction based infinite adjustment of head and arm also allows the light to deflect out of the way if pushed from passing loads
- Connection to mains supply via 5amp fuse.


## OPERATION

To use the unit simply press the on button and the light will come on to 100% power/brightness and is ready for use. The additional buttons shown below allow other features to be accessed.

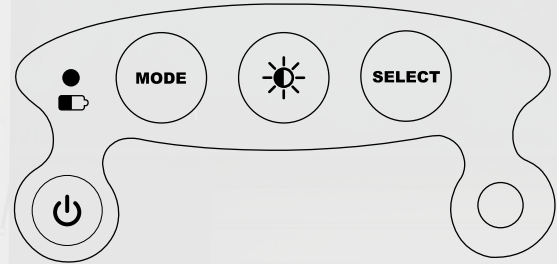

- (Button 1) = ON/OFF
- (Button 2) = MODE - Flashing, SOS, Alternate flashing
- (Button 3) = BRIGHTNESS - 100%, 125%, 8%, 25%, 50%, 75%.
- (Button 4) = SELECT - Inner, outer, both inner and outer LED arrays.

PRODUCT CODE	WATTAGE	VOLTAGE	LUMEN OUTPUT	DIMENSIONS (W x H x D)	WEIGHT
LB/LEDK9	45W	110-240V	6600	Storage: 87.5cm x 24cm x 22cm Fully extended length: 1m 44cm	5.2Kg



## OPTIONS

Remote can control the head from up to 100m away