



LED LOADING BAY DOCK LIGHT


The Ritelite LED loading bay dock light offers users a high quality, highly durable LED alternative to previous halogen models with increased lumen output, increased robustness and a solution that is virtually maintenance free.

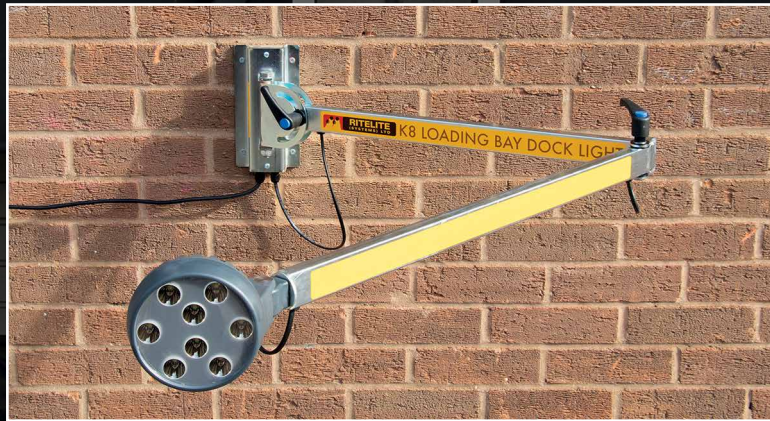


The unit features a rotating variable focusing system that can be adjusted between spot and flood beams for multiple applications, the spot beam enables light to reach further inside container / warehouse area and the light can be focused to ensure minimum glare to workers.


FLOOD BEAM





ADJUSTING BEAM FROM SPOT TO FLOOD

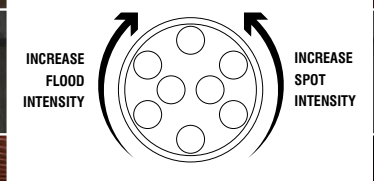

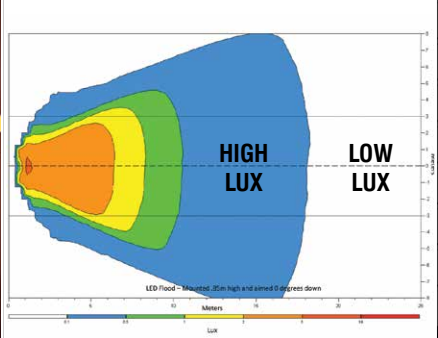




HIGH LUX **LOW LUX**

LED Flood - Mounted 25m high and aimed 0 degrees down

SPOT BEAM





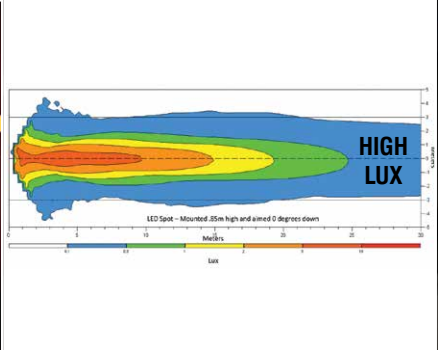

HIGH LUX

LED Spot - Mounted 25m high and aimed 0 degrees down



KEY FEATURES

- Minimal power consumption
- Maintenance free – 50,000 hour life
- High output LED's – 5000 lumen output!
- Spot to flood variable focusing system
- Compact head design to reduce possibility of impact damage
- Suitable for food grade applications – polycarbonate lens – No glass!
- IP54 LED head – Dust tight and able to withstand water spray.
- Suitable for input voltage of 110-240V AC
- Shock and vibration resistant
- Compact, foldable design enables light to be folded back against the wall of the dock when not in use.
- Moves in 2 planes and pivots at 3 points to allow user to easily and accurately position light where required for maximum control of light.
- All components made from high quality materials to ensure maximum life in arduous conditions

PRODUCT CODE	WATTAGE	VOLTAGE	LUMEN OUTPUT	DIMENSIONS (W x H x D)	WEIGHT
LB/LEDK8/HP	37W	110-240V	5000	Storage: 80cm x 24cm x15cm Fully extended length: 1m 50cm	4.5Kg